


*3" Hot Mix Asphalt (HMA) surface (fine gradation only). For criteria see Section II, "Technical Specifications."
 **4" Graded Aggregate Subbase (GASB). For criteria see Section II of these Specifications and Standards and MSHA Standard Specifications for Construction and Materials.

Notes:

1. Fill slope should typically range from 12:1 to 6:1, with a maximum slope of 3:1.
2. Easement for construction and maintenance is required where trail crosses property not in the County right-of-way.

Pavement Detail for Construction

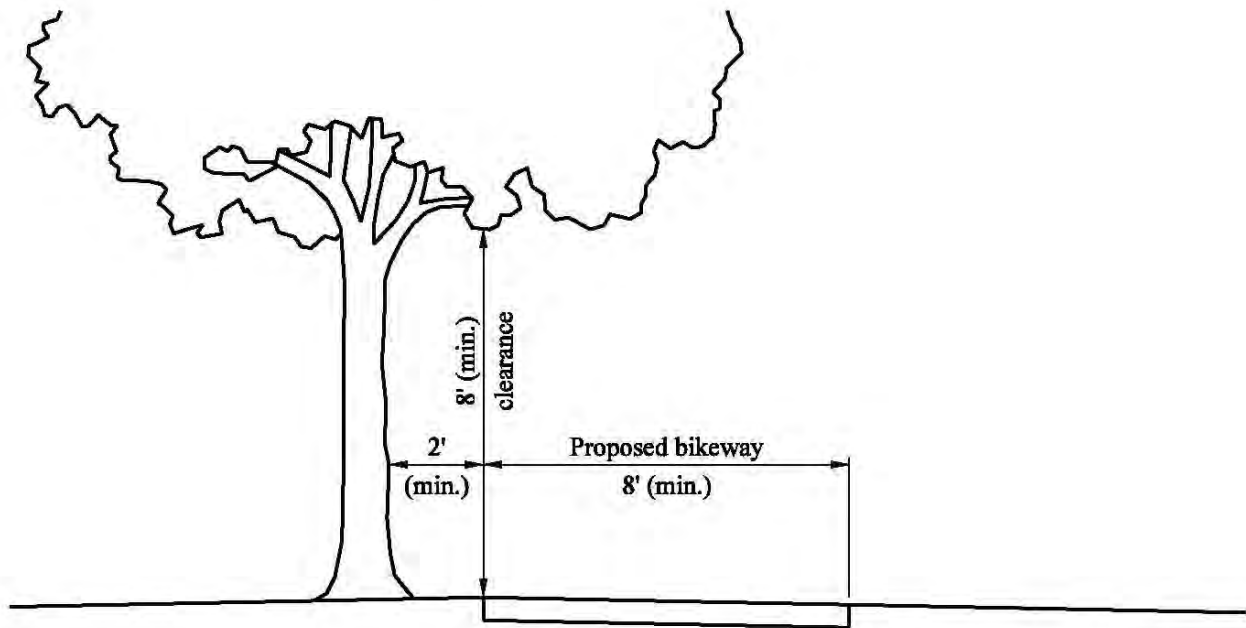

Clearance Detail

APPROVED:			DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD	
_____ DIRECTOR			Hiker/Biker Trail on Private Easement (Maintained by Others)	
_____ DATE				
REVISION DATE:	APPROVED BY:			

